


MODELS 1530, 1630,
1631, 2031

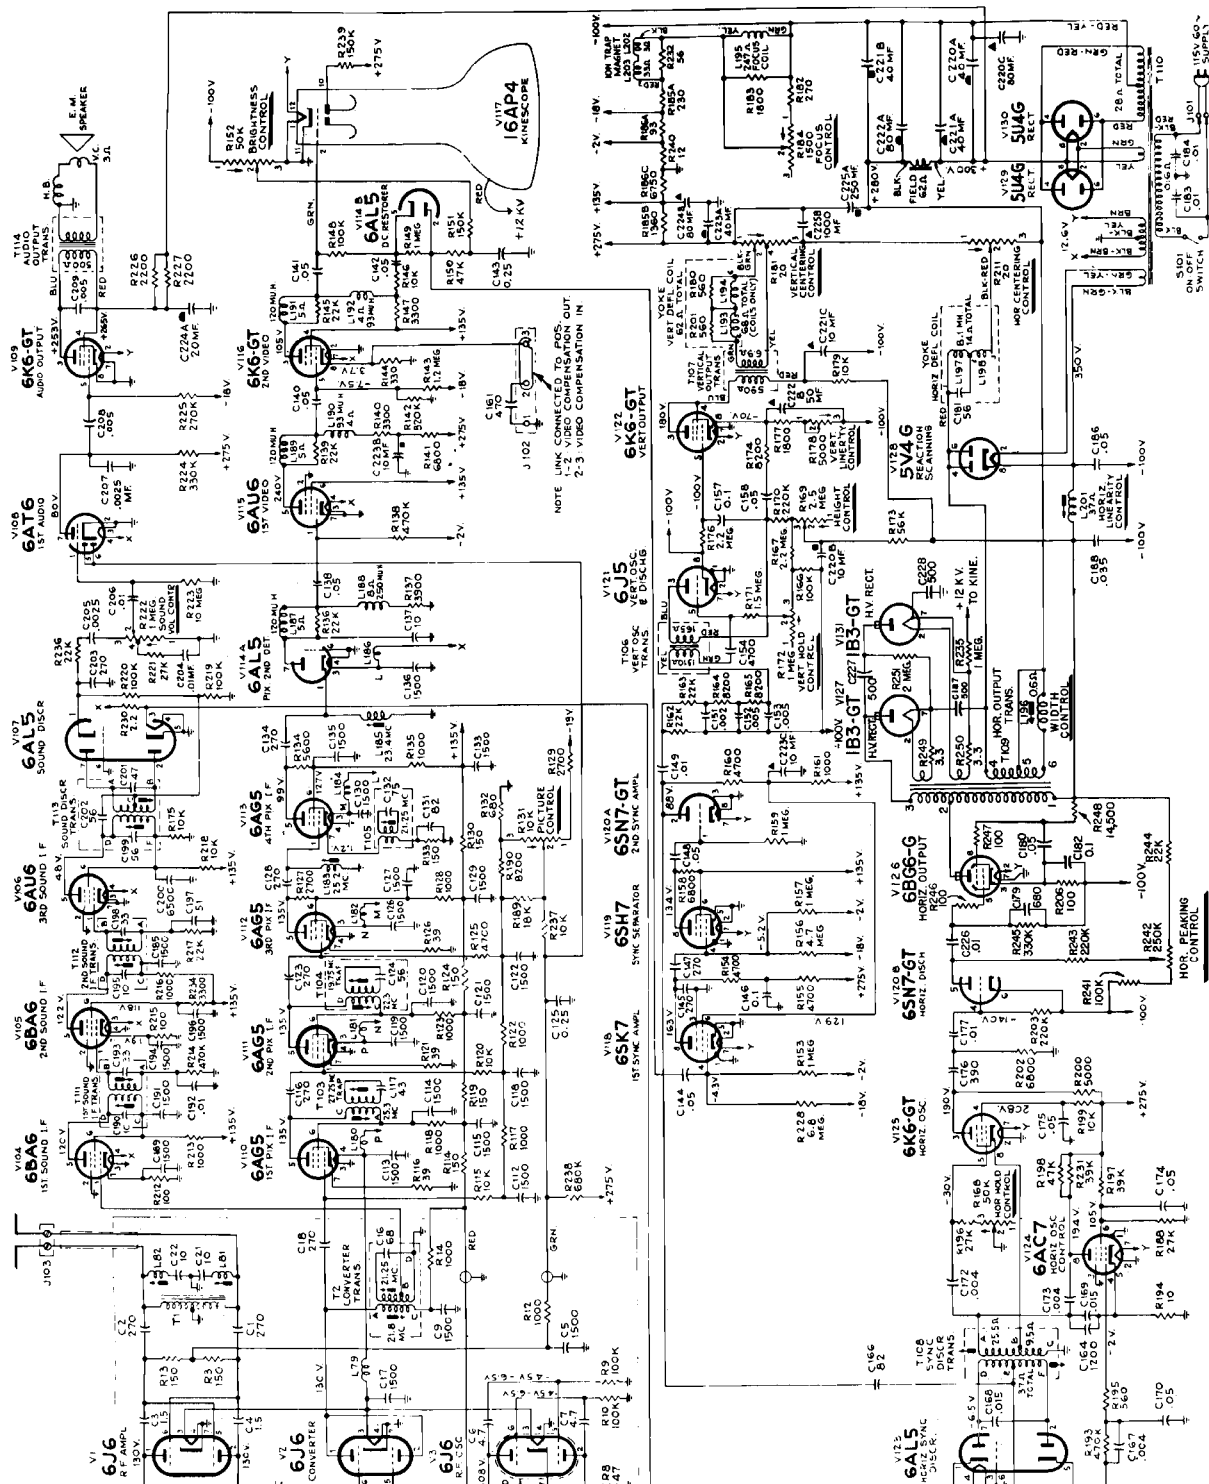

ALL RESISTANCE VALUES ARE IN OHMS * = 1000
CAPACITANCE VALUES IN MMFD UNLESS OTHERWISE NOTED
DIRECTION OF ARROWS AT CONTROLS INDICATE CLOCKWISE
ROTATION
ALL VOLTAGES MEASURED WITH VOLTOHM/ST AND WITH
PICTURE AT MIN. VOLTAGES SHOULD HOLD WITHIN 25%
WITH 117V AC SUPPLY

NOTE: All other data same as RCA Model 630 TS.
See TVI page 1-76 through 1-116.

©John F. Rider